
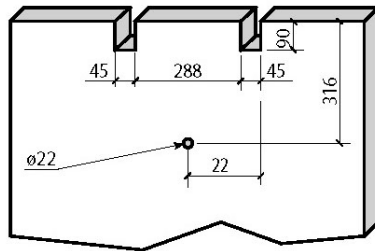




# AEL1050

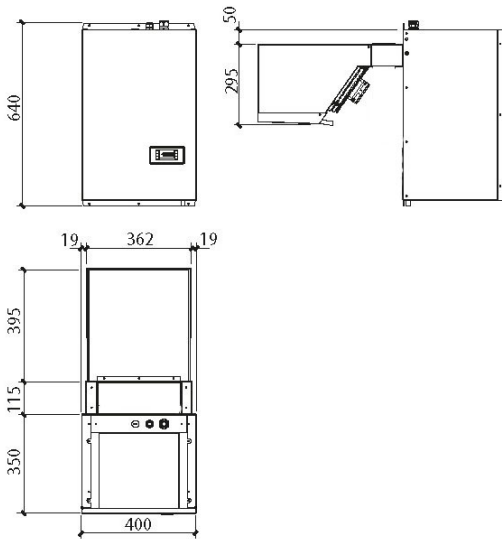

Application/Type		1
Voltage	V/ph/Hz	230/1/50
Absorbed Power	kW	0,82
Compressor type		hermetic
Displacement (50Hz )	m3/h	3,8
Defrost type		by heaters
Absorption during defrost	kW	0,7
Refrigerant		R134a
	GWP	1430
Refrigerant quantity	kg	0,65
	TCO2 eq	0,93
Condenser (type)		
Fin pitch		micro-channel type
Fans no.		1
fan ø	mm	254
Model	ph/p	1ph-4P
Fan absorption (each)	W	80
Total airflow	m3/h	700
Evaporator (type)		
Fin pitch	mm	5
Fans no.		1
fan ø	mm	200
Model	ph/p	1ph-2P
Fan absorption (each)	W	75
Total airflow	m3/h	600
Air-throw	m	4
Unit weight	kg	49

Ti (°C)	Ta (°C)	Qo (W)
-5	27	873
	32	809
	38	738
	43	677
0	27	1046
	32	982
	38	906
	43	831
5	27	1222
	32	1147
	38	1062
	43	983

V100 (m³)	V80 (m³)	V60 (m³)
6,0	5,5	5,0
5,4	4,9	4,5
4,7	4,3	3,9
4,1	3,8	3,4
7,8	7,1	6,5
7,2	6,5	5,9
6,3	5,8	5,3
5,6	5,1	4,7
9,8	8,9	8,2
9,0	8,2	7,4
8,0	7,3	6,7
7,2	6,5	5,9



imballo packing	
<b>P</b>	480
<b>L</b>	945
<b>H</b>	860
<b>Kg</b>	12
<b>Vol.</b>	0,3

Ti = Cold room temperature  
 Ta = Outside temperature  
 Qo = Refrigerating capacity  
 V = Cold room volume (Insulation thickness 100mm)