
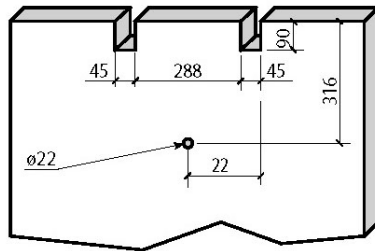




# AEV1170

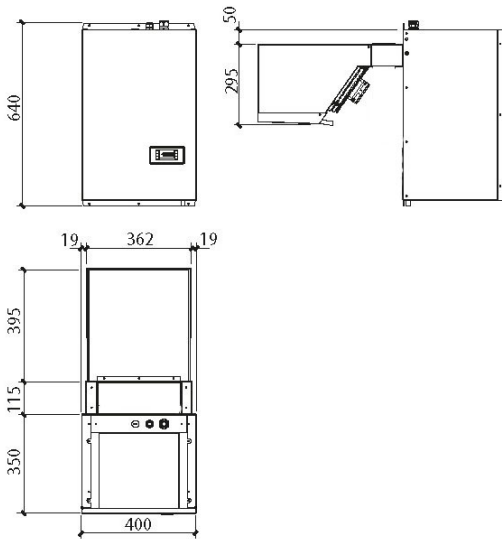

Application/Type		1
Voltage	V/ph/Hz	230/1/50
Absorbed Power	kW	1,38
Compressor type		hermetic
Displacement (50Hz )	m3/h	5,99
Defrost type		by heaters
Absorption during defrost	kW	0,7
Refrigerant		R452A
	GWP	2140
Refrigerant quantity	kg	0,54
	TCO2 eq	1,16
Condenser (type)		
Fin pitch		micro-channel type
Fans no.		1
fan ø	mm	254
Model	ph/p	1ph-4P
Fan absorption (each)	W	80
Total airflow	m3/h	700
Evaporator (type)		
Fin pitch	mm	5
Fans no.		1
fan ø	mm	200
Model	ph/p	1ph-4P
Fan absorption (each)	W	38
Total airflow	m3/h	600
Air-throw	m	4
Unit weight	kg	61

Ti (°C)	Ta (°C)	Qo (W)
-25	27	929
	32	855
	38	765
	43	692
-22	27	1049
	32	979
	38	886
	43	806
-18	27	1206
	32	1136
	38	1039
	43	949

V100 (m³)
5,0
4,3
3,6
3,0
6,1
5,4
4,6
3,9
7,7
7,0
6,0
5,2



	imballo packing
<b>P</b>	480
<b>L</b>	945
<b>H</b>	860
<b>Kg</b>	12
<b>Vol.</b>	0,3

Ti = Cold room temperature  
 Ta = Outside temperature  
 Qo = Refrigerating capacity  
 V = Cold room volume (Insulation thickness 100mm)